
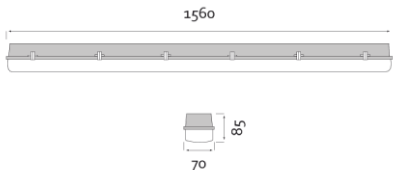
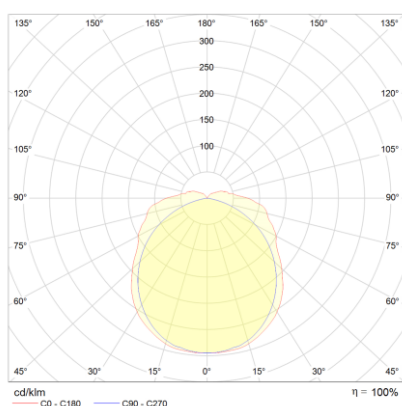






Figure Dimensions	Technical data
 	Rated luminous flux of the luminaire 1296 lm
	Colour temperature 4659 K
	CRI 83.9
	Light control Planar illumination
	LED power 9 W
	Power AC 25.6 W
	Power DC 9.2 W
	Dimmable No
	Nominal voltage AC 230 V AC 50/60 Hz
	Autonomy 1 h
	Maintained mode No
	Suitable for maintained mode Yes
	Switchable operation mode Yes
	Degree of protection IP65
	Protection class II
	Housing colour Grey
	Housing material Plastic
	Mounting Surface-mounted ceiling
	Length 1560 mm
	Width 70 mm
	Height 85 mm
	Ambient temperature -5 - 35 °C
	Test system Automatic test system

Light Distribution Curve



Distance table

Mounting height				
2.00 m	2.45 m	5.68 m	1.20 m	2.49 m
2.50 m	2.78 m	6.41 m	1.51 m	3.02 m
3.00 m	3.13 m	7.20 m	1.75 m	3.64 m
3.50 m	3.42 m	7.86 m	2.05 m	4.27 m
4.00 m	3.65 m	8.70 m	2.26 m	4.70 m
4.50 m	3.70 m	9.14 m	2.55 m	5.31 m
5.00 m	3.98 m	9.83 m	2.72 m	5.91 m
5.50 m	4.08 m	10.10 m	3.00 m	6.25 m
6.00 m	4.46 m	10.28 m	3.14 m	6.83 m
6.50 m	4.66 m	10.77 m	3.41 m	7.41 m
7.00 m	4.84 m	11.20 m	3.52 m	7.67 m
7.50 m	4.82 m	11.59 m	3.62 m	8.22 m
8.00 m	5.14 m	11.93 m	3.86 m	8.78 m
8.50 m	5.06 m	12.23 m	3.92 m	8.95 m
9.00 m	5.15 m	12.95 m	3.97 m	9.48 m
9.50 m	5.01 m	13.18 m	4.00 m	9.59 m
10.00 m	5.05 m	13.88 m	4.21 m	10.10 m
10.50 m	4.86 m	14.05 m	4.21 m	10.16 m
11.00 m	4.86 m	14.18 m	4.19 m	10.65 m
11.50 m	4.61 m	14.27 m	4.16 m	10.65 m
12.00 m	4.57 m	14.32 m	4.10 m	11.11 m