


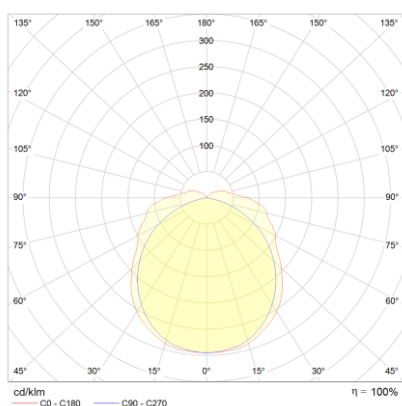






Figure Dimensions	Technical data
  	Rated luminous flux of the luminaire 588 lm
	Colour temperature 4659 K
	CRI 83.9
	Light control Planar illumination
	LED power 4 W
	Power AC 25.6 W
	Power DC 4.2 W
	Dimmable No
	Nominal voltage AC 230 V AC 50/60 Hz
	Autonomy 8 h
	Maintained mode No
	Suitable for maintained mode Yes
	Switchable operation mode Yes
	Degree of protection IP65
	Protection class II
	Housing colour Grey
	Housing material Plastic
	Mounting Surface-mounted ceiling
	Length 1560 mm
	Width 70 mm
	Height 85 mm
	Ambient temperature -15 - 35 °C
	Test system Automatic test system

Light Distribution Curve



Distance table

Mounting height				
2.00 m	2.05 m	4.73 m	1.15 m	2.39 m
2.50 m	2.33 m	5.36 m	1.45 m	3.02 m
3.00 m	2.45 m	6.25 m	1.68 m	3.50 m
3.50 m	2.67 m	6.60 m	1.89 m	4.10 m
4.00 m	2.95 m	7.05 m	2.08 m	4.52 m
4.50 m	3.09 m	7.41 m	2.25 m	5.10 m
5.00 m	3.32 m	7.68 m	2.40 m	5.45 m
5.50 m	3.38 m	8.16 m	2.52 m	5.76 m
6.00 m	3.42 m	8.60 m	2.63 m	6.29 m
6.50 m	3.27 m	8.98 m	2.72 m	6.54 m
7.00 m	3.37 m	9.33 m	2.79 m	6.74 m
7.50 m	3.15 m	9.63 m	2.85 m	7.23 m
8.00 m	3.04 m	9.89 m	2.88 m	7.38 m
8.50 m	2.90 m	9.72 m	2.73 m	7.49 m
9.00 m	2.90 m	9.48 m	2.73 m	7.94 m
9.50 m	2.70 m	9.59 m	2.52 m	7.99 m
10.00 m	2.66 m	9.25 m	2.29 m	8.01 m
10.50 m	2.40 m	9.27 m	2.02 m	8.00 m
11.00 m	1.92 m	8.82 m	1.73 m	7.94 m
11.50 m	1.40 m	8.31 m	1.20 m	7.86 m