
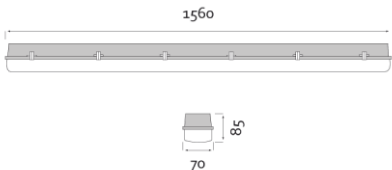
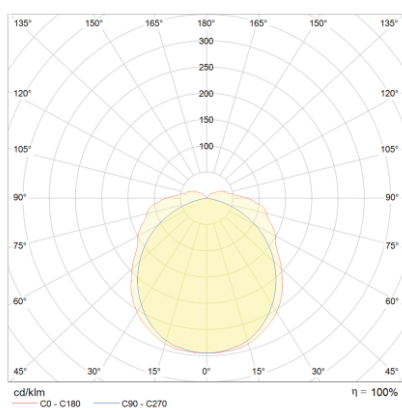






Figure Dimensions	Technical data
 	Rated luminous flux of the luminaire 2355 lm
	Colour temperature 4659 K
	CRI 83.9
	Light control Planar illumination
	LED power 22 W
	Power AC 25.4 W
	Inrush current 30.0 A
	Dimmable No
	Nominal voltage AC 230 V AC 50/60 Hz
	Nominal voltage DC 216 V DC
	Maintained mode No
	Suitable for maintained mode Yes
	Switchable operation mode Yes
	Degree of protection IP65
	Protection class II
	Housing colour Grey
	Housing material Plastic
	Mounting Surface-mounted ceiling
	Length 1560 mm
	Width 70 mm
	Height 85 mm
	Ambient temperature -5 - 35 °C
	Test system ZB2 CPS

Light Distribution Curve



Distance table

Mounting height				
2.00 m	3.06 m	6.63 m	1.24 m	2.49 m
2.50 m	3.58 m	7.73 m	1.51 m	3.14 m
3.00 m	4.01 m	8.98 m	1.82 m	3.79 m
3.50 m	4.22 m	10.13 m	2.05 m	4.27 m
4.00 m	4.67 m	11.18 m	2.35 m	4.89 m
4.50 m	4.90 m	11.30 m	2.65 m	5.52 m
5.00 m	5.27 m	12.14 m	2.84 m	5.91 m
5.50 m	5.42 m	12.91 m	3.13 m	6.51 m
6.00 m	5.71 m	13.61 m	3.28 m	7.11 m
6.50 m	5.78 m	14.25 m	3.56 m	7.71 m
7.00 m	5.80 m	14.83 m	3.68 m	7.98 m
7.50 m	6.00 m	15.36 m	3.94 m	8.56 m
8.00 m	6.18 m	15.83 m	4.03 m	9.14 m
8.50 m	6.11 m	15.69 m	4.29 m	9.33 m
9.00 m	6.24 m	16.05 m	4.35 m	9.88 m
9.50 m	6.35 m	15.80 m	4.59 m	10.44 m
10.00 m	6.44 m	16.64 m	4.62 m	10.54 m
10.50 m	6.51 m	17.48 m	4.64 m	11.08 m
11.00 m	6.30 m	17.68 m	4.86 m	11.61 m
11.50 m	6.33 m	17.84 m	4.84 m	11.63 m
12.00 m	6.34 m	17.31 m	4.81 m	12.14 m