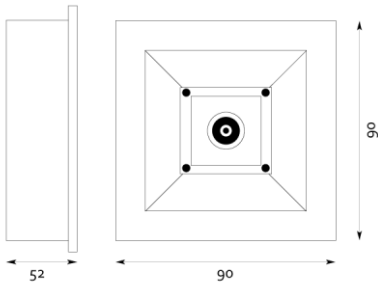


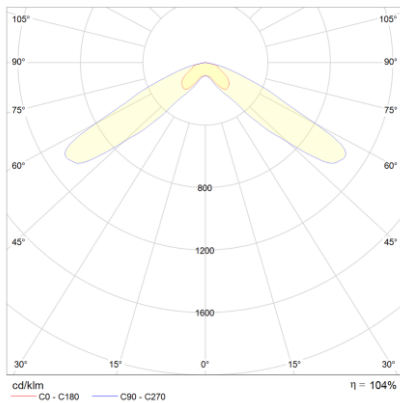
Figure | Dimensions







Technical data

Rated luminous flux of the luminaire	137 lm
Luminous intensity	148 cd
Colour temperature	6143 K
CRI	67.3
Beam angle	131.6 °
Light control	Escape route illumination
LED power	1 W
Power AC	0.2 W
Power DC	1.2 W
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Autonomy	8 h
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP20
Protection class	II
Housing colour	White
Housing material	Plastic
Mounting	Recessed-mounted ceiling
Length	95 mm
Width	95 mm
Height	48 mm
Length mounting hole	83 mm
Width mounting hole	83 mm
Depth mounting hole	150 mm
Ambient temperature	0 - 40 °C
Battery Cell technologie	LiFePO4
Battery Nominal voltage	6.4 V
Battery Nominal capacity	3000 mAh
Test system	Automatic test system

Light Distribution Curve



Distance table

Mounting height				
2.00 m	5.21 m	13.08 m	6.54 m	14.93 m
2.50 m	5.62 m	14.52 m	7.69 m	17.44 m
3.00 m	6.15 m	14.85 m	8.24 m	19.62 m
3.50 m	6.58 m	15.72 m	9.12 m	21.54 m
4.00 m	7.22 m	17.16 m	9.90 m	23.23 m
4.50 m	7.49 m	17.66 m	10.60 m	24.73 m
5.00 m	7.70 m	18.81 m	11.78 m	26.05 m
5.50 m	8.15 m	19.84 m	12.35 m	27.23 m
6.00 m	8.26 m	20.78 m	12.87 m	29.70 m
6.50 m	8.63 m	21.64 m	13.33 m	30.63 m
7.00 m	8.64 m	22.40 m	14.35 m	32.98 m
7.50 m	8.94 m	23.10 m	14.72 m	33.69 m
8.00 m	8.88 m	23.72 m	15.05 m	35.94 m
8.50 m	8.80 m	23.40 m	15.99 m	36.46 m
9.00 m	9.00 m	23.89 m	16.24 m	36.90 m
9.50 m	8.86 m	24.32 m	17.14 m	38.96 m
10.00 m	8.69 m	24.70 m	18.04 m	39.25 m
10.50 m	8.50 m	25.03 m	18.19 m	41.22 m
11.00 m	7.99 m	25.31 m	19.05 m	43.18 m
11.50 m	0.00 m	25.54 m	19.14 m	43.26 m
12.00 m	0.00 m	24.85 m	19.97 m	45.14 m