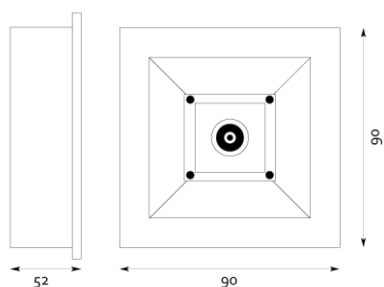


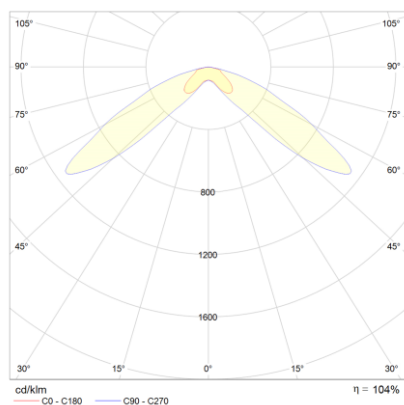
Figure | Dimensions







Technical data

Rated luminous flux of the luminaire	289 lm
Luminous intensity	329 cd
Colour temperature	6250 K
CRI	67.4
Beam angle	130.3 °
Light control	Escape route illumination
LED power	2 W
Power AC	3.2 W
Lumen per watt	89 lm/W
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Nominal voltage DC	216 V DC
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP20
Protection class	II
Housing colour	White
Housing material	Plastic
Mounting	Recessed-mounted ceiling
Length	95 mm
Width	95 mm
Height	48 mm
Length mounting hole	83 mm
Width mounting hole	83 mm
Depth mounting hole	150 mm
Ambient temperature	0 - 40 °C
Test system	CPS

Light Distribution Curve



Distance table

Mounting height				
2.00 m	6.54 m	16.04 m	8.02 m	18.82 m
2.50 m	7.26 m	17.44 m	9.33 m	20.05 m
3.00 m	7.82 m	19.62 m	10.46 m	24.06 m
3.50 m	8.24 m	20.33 m	11.45 m	26.12 m
4.00 m	8.58 m	20.84 m	12.31 m	27.90 m
4.50 m	8.83 m	22.28 m	13.07 m	31.39 m
5.00 m	9.40 m	22.46 m	14.52 m	32.71 m
5.50 m	9.92 m	23.59 m	15.11 m	33.85 m
6.00 m	10.39 m	24.60 m	15.63 m	36.93 m
6.50 m	10.40 m	25.51 m	16.09 m	37.76 m
7.00 m	10.78 m	26.33 m	17.33 m	40.66 m
7.50 m	11.12 m	27.06 m	17.67 m	41.21 m
8.00 m	11.42 m	27.71 m	17.97 m	43.96 m
8.50 m	11.70 m	28.29 m	19.09 m	44.29 m
9.00 m	11.94 m	29.96 m	19.30 m	46.89 m
9.50 m	12.61 m	30.41 m	20.37 m	47.03 m
10.00 m	12.80 m	30.80 m	20.50 m	49.50 m
10.50 m	12.97 m	31.13 m	21.53 m	49.47 m
11.00 m	12.65 m	32.62 m	21.59 m	51.83 m
11.50 m	12.77 m	32.85 m	22.57 m	51.66 m
12.00 m	12.87 m	33.03 m	22.57 m	53.90 m