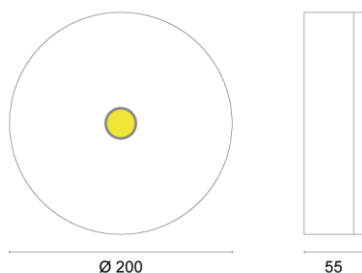


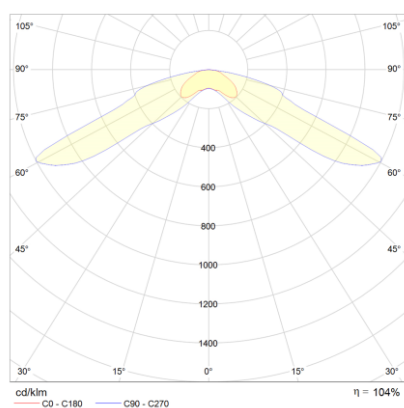
Figure | Dimensions







Technical data

Rated luminous flux of the luminaire	607 lm
Luminous intensity	607 cd
Colour temperature	6402 K
CRI	68.2
Beam angle	133.5 °
Light control	Escape route illumination
LED power	6 W
Power AC	9.4 W
Power DC	9.0 W
Lumen per watt	67 lm/W
Inrush current	4.0 A
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Nominal voltage DC	216 V DC
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP65
Protection class	II
Housing colour	White
Housing material	Plastic
Mounting	Surface-mounted ceiling
Length	202 mm
Width	202 mm
Height	58 mm
Weight	0.53 kg
Ambient temperature	0 - 40 °C
Test system	ZBX CPS

Light Distribution Curve



Distance table

Mounting height	 a	 b	 c	 d
2.00 m	4.20 m	9.70 m	6.41 m	15.72 m
2.50 m	4.63 m	11.05 m	7.14 m	17.16 m
3.00 m	5.13 m	12.14 m	7.71 m	19.36 m
3.50 m	5.33 m	13.02 m	8.56 m	20.10 m
4.00 m	5.66 m	13.72 m	8.89 m	21.76 m
4.50 m	5.71 m	14.84 m	10.02 m	23.24 m
5.00 m	5.71 m	15.28 m	10.64 m	23.37 m
5.50 m	5.86 m	15.60 m	11.20 m	25.73 m
6.00 m	5.56 m	15.82 m	12.22 m	26.77 m
6.50 m	5.23 m	15.96 m	12.68 m	29.02 m
7.00 m	0.00 m	16.59 m	13.09 m	29.85 m
7.50 m	0.00 m	16.57 m	12.92 m	32.00 m
8.00 m	0.00 m	16.49 m	12.74 m	32.64 m
8.50 m	0.00 m	15.78 m	12.54 m	34.69 m