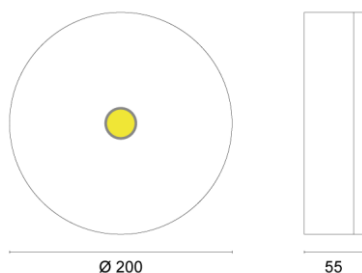


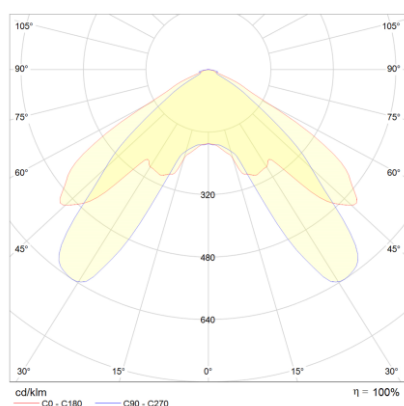
Figure | Dimensions







Technical data

Rated luminous flux of the luminaire	677 lm
Luminous intensity	433 cd
Colour temperature	6364 K
CRI	67.1
Beam angle	112.2 °
Light control	Planar illumination
LED power	6 W
Power AC	9.4 W
Power DC	9.0 W
Lumen per watt	74 lm/W
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Nominal voltage DC	216 V DC
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP65
Protection class	II
Housing colour	White
Housing material	Plastic
Mounting	Surface-mounted ceiling
Length	202 mm
Width	202 mm
Height	58 mm
Weight	0.53 kg
Ambient temperature	0 - 40 °C
Test system	CPS

Light Distribution Curve



Distance table

Mounting height				
2.00 m	4.00 m	9.19 m	3.38 m	7.04 m
2.50 m	4.61 m	10.51 m	3.92 m	8.49 m
3.00 m	5.32 m	12.10 m	4.54 m	9.82 m
3.50 m	5.98 m	12.98 m	4.93 m	11.04 m
4.00 m	6.57 m	14.25 m	5.44 m	12.16 m
4.50 m	7.12 m	15.42 m	5.90 m	13.20 m
5.00 m	7.92 m	17.15 m	6.34 m	14.14 m
5.50 m	8.39 m	18.14 m	6.73 m	15.00 m
6.00 m	8.82 m	19.80 m	7.09 m	15.79 m
6.50 m	9.21 m	20.64 m	7.42 m	17.12 m
7.00 m	9.22 m	22.24 m	7.72 m	17.79 m
7.50 m	9.54 m	22.94 m	7.99 m	18.40 m
8.00 m	9.82 m	23.57 m	8.23 m	19.64 m
8.50 m	9.72 m	25.06 m	8.45 m	20.14 m
9.00 m	9.94 m	25.56 m	8.64 m	20.59 m
9.50 m	9.79 m	26.01 m	8.81 m	21.74 m
10.00 m	9.28 m	26.41 m	9.28 m	22.10 m
10.50 m	5.32 m	26.75 m	9.41 m	22.41 m
11.00 m	4.88 m	27.04 m	9.52 m	23.48 m