
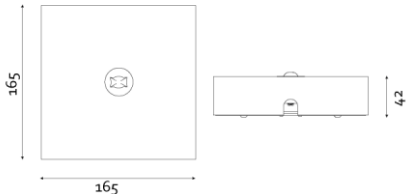
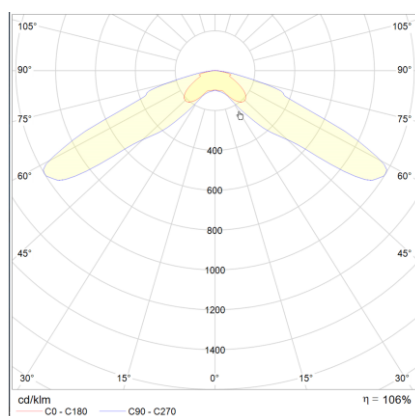






Figure Dimensions	Technical data
 	Rated luminous flux of the luminaire 132 lm
	Luminous intensity 132 cd
	Colour temperature 5896 K
	CRI 68.0
	Beam angle 132.9 °
	Light control Escape route illumination
	LED power 1 W
	Power AC 0.2 W
	Power DC 1.2 W
	Dimmable Yes
	Nominal voltage AC 230 V AC 50/60 Hz
	Autonomy 8 h
	Maintained mode No
	Suitable for maintained mode No
	Switchable operation mode No
	Degree of protection IP42
	Protection class I
	Housing colour White
	Housing material Steel sheet
	Mounting Surface-mounted ceiling
	Length 165 mm
	Width 165 mm
	Height 42 mm
	Ambient temperature 0 - 40 °C
	Battery Cell technologie LiFePO4
	Battery Nominal voltage 6.4 V
	Battery Nominal capacity 3000 mAh
	Test system ECC2

Light Distribution Curve



Distance table

Mounting height				
2.00 m	4.78 m	12.80 m	6.85 m	15.90 m
2.50 m	5.50 m	13.56 m	8.14 m	18.73 m
3.00 m	5.81 m	14.03 m	9.27 m	21.16 m
3.50 m	6.54 m	14.98 m	10.26 m	23.26 m
4.00 m	6.92 m	16.45 m	10.54 m	25.09 m
4.50 m	7.22 m	17.78 m	11.29 m	26.68 m
5.00 m	7.74 m	18.19 m	11.97 m	28.08 m
5.50 m	7.91 m	19.25 m	12.57 m	29.32 m
6.00 m	8.33 m	20.21 m	13.11 m	30.40 m
6.50 m	8.41 m	21.09 m	14.23 m	31.36 m
7.00 m	8.75 m	21.88 m	14.66 m	33.83 m
7.50 m	8.74 m	22.59 m	15.73 m	34.56 m
8.00 m	8.70 m	23.23 m	16.06 m	36.92 m
8.50 m	8.94 m	23.81 m	17.09 m	37.44 m
9.00 m	8.84 m	24.32 m	17.34 m	39.69 m
9.50 m	8.70 m	23.90 m	17.56 m	41.93 m
10.00 m	8.25 m	24.29 m	18.50 m	42.18 m
10.50 m	7.24 m	24.63 m	18.64 m	44.33 m
11.00 m	0.00 m	24.93 m	18.77 m	44.43 m
11.50 m	0.00 m	25.18 m	19.63 m	46.48 m
12.00 m	0.00 m	25.38 m	19.70 m	48.53 m