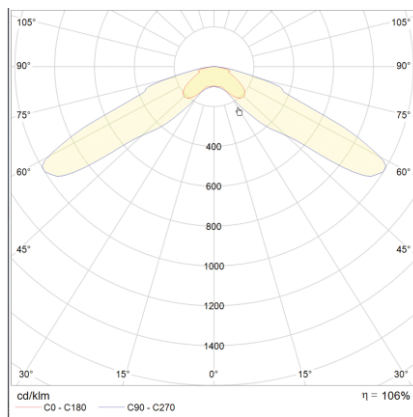


Figure | Dimensions





Technical data

Rated luminous flux of the luminaire	132 lm
Luminous intensity	132 cd
Colour temperature	5869 K
CRI	68.0
Beam angle	132.9 °
Light control	Escape route illumination
LED power	1 W
Power AC	0.2 W
Power DC	1.2 W
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Autonomy	3 h
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP42/20
Protection class	II
Housing colour	White
Housing material	Steel sheet
Mounting	Recessed-mounted ceiling
Length	78 mm
Width	78 mm
Height	7 mm
Installation depth	30 mm
Length mounting hole	68 mm
Width mounting hole	68 mm
Depth mounting hole	200 mm
Weight	0.36 kg
Ambient temperature	0 - 40 °C
Battery Cell technologie	LiFePO4
Battery Nominal voltage	6.4 V
Battery Nominal capacity	1000 mAh
Test system	Automatic test system

Light Distribution Curve



Distance table

Mounting height				
2.00 m	5.08 m	12.76 m	7.28 m	16.89 m
2.50 m	5.50 m	13.46 m	8.54 m	19.65 m
3.00 m	6.05 m	14.60 m	9.65 m	22.02 m
3.50 m	6.49 m	15.50 m	10.02 m	24.06 m
4.00 m	6.84 m	16.94 m	10.85 m	25.84 m
4.50 m	7.41 m	17.47 m	11.59 m	27.39 m
5.00 m	7.62 m	18.62 m	12.25 m	28.75 m
5.50 m	8.08 m	19.66 m	12.84 m	29.95 m
6.00 m	8.19 m	20.61 m	13.36 m	31.00 m
6.50 m	8.56 m	21.47 m	14.49 m	31.93 m
7.00 m	8.58 m	21.40 m	14.90 m	34.40 m
7.50 m	8.88 m	22.09 m	15.98 m	35.10 m
8.00 m	8.83 m	22.71 m	16.30 m	37.46 m
8.50 m	8.75 m	23.26 m	16.58 m	37.96 m
9.00 m	8.64 m	23.75 m	17.57 m	40.20 m
9.50 m	8.51 m	24.19 m	17.77 m	40.53 m
10.00 m	8.06 m	24.57 m	18.71 m	42.68 m
10.50 m	6.79 m	24.91 m	18.85 m	44.82 m
11.00 m	0.00 m	25.19 m	18.97 m	44.90 m
11.50 m	0.00 m	25.43 m	19.83 m	46.95 m
12.00 m	0.00 m	24.75 m	19.89 m	46.91 m