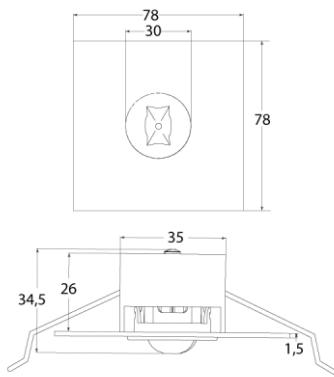


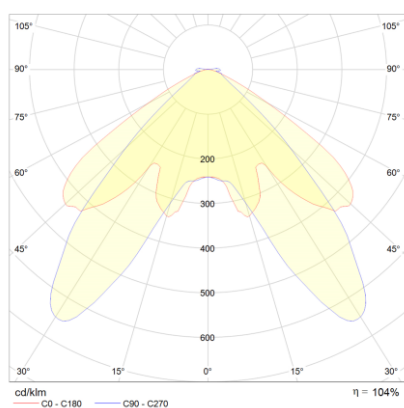
Figure | Dimensions







Technical data

Rated luminous flux of the luminaire	251 lm
Luminous intensity	164 cd
Colour temperature	6012 K
CRI	69.9
Beam angle	103.9 °
Light control	Planar illumination
LED power	2 W
Dimmable	Yes
Nominal voltage AC	230 V AC 50/60 Hz
Autonomy	3 h
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP42/20
Protection class	II
Housing colour	White
Housing material	Steel sheet
Mounting	Recessed-mounted ceiling
Length	78 mm
Width	78 mm
Height	7 mm
Installation depth	30 mm
Length mounting hole	68 mm
Width mounting hole	68 mm
Depth mounting hole	200 mm
Weight	0.39 kg
Ambient temperature	0 - 40 °C
Battery Cell technologie	LiFePO4
Battery Nominal voltage	6.4 V
Battery Nominal capacity	2000 mAh
Test system	ECC2

Light Distribution Curve



Distance table

Mounting height				
2.00 m	5.08 m	11.33 m	4.59 m	11.33 m
2.50 m	5.77 m	13.46 m	5.25 m	12.76 m
3.00 m	6.63 m	14.60 m	5.55 m	13.25 m
3.50 m	7.40 m	16.26 m	5.98 m	14.80 m
4.00 m	8.10 m	17.74 m	6.32 m	15.50 m
4.50 m	8.73 m	19.09 m	6.85 m	16.06 m
5.00 m	9.31 m	21.23 m	7.34 m	17.15 m
5.50 m	9.83 m	22.35 m	7.78 m	18.14 m
6.00 m	10.31 m	23.36 m	8.19 m	19.04 m
6.50 m	11.17 m	25.32 m	8.56 m	19.86 m
7.00 m	11.57 m	26.14 m	8.90 m	20.61 m
7.50 m	11.92 m	26.88 m	9.54 m	21.28 m
8.00 m	12.72 m	28.68 m	9.82 m	22.71 m
8.50 m	13.01 m	29.27 m	10.07 m	23.26 m
9.00 m	13.78 m	31.00 m	10.67 m	23.75 m
9.50 m	14.01 m	31.46 m	10.87 m	25.08 m
10.00 m	14.75 m	33.12 m	11.45 m	25.47 m
10.50 m	14.92 m	34.78 m	11.61 m	26.75 m
11.00 m	15.64 m	35.05 m	12.16 m	27.04 m
11.50 m	15.76 m	36.65 m	12.28 m	28.28 m
12.00 m	16.45 m	36.80 m	12.82 m	28.48 m