


**Figure | Dimensions**

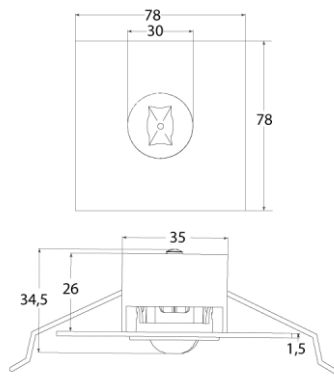

**Technical data**

Rated luminous flux of the luminaire	132 lm
Luminous intensity	132 cd
Colour temperature	5869 K
CRI	68.0
Beam angle	132.9 °
Light control	Escape route illumination
LED power	1 W
Power AC	0.2 W
Power DC	1.2 W
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Autonomy	8 h
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP42/20
Protection class	II
Housing colour	White
Housing material	Steel sheet
Mounting	Recessed-mounted ceiling
Length	78 mm
Width	78 mm
Height	7 mm
Installation depth	30 mm
Length mounting hole	68 mm
Width mounting hole	68 mm
Depth mounting hole	200 mm
Weight	0.39 kg
Ambient temperature	0 - 40 °C
Battery Cell technologie	LiFePO4
Battery Nominal voltage	6.4 V
Battery Nominal capacity	3000 mAh
Test system	NB

**Light Distribution Curve**

