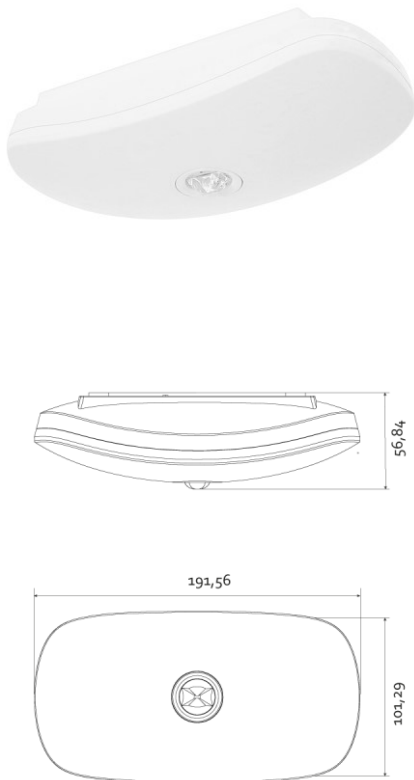


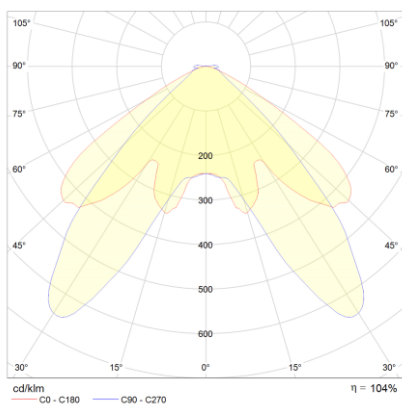
### Figure | Dimensions







## Technical data

Rated luminous flux of the luminaire	251 lm
Luminous intensity	164 cd
Colour temperature	6012 K
CRI	69.9
Beam angle	103.9 °
Light control	Planar illumination
LED power	2 W
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Nominal voltage DC	216 V DC
Maintained mode	No
Suitable for maintained mode	No
Switchable operation mode	No
Degree of protection	IP42
Protection class	II
Housing colour	White
Housing material	Plastic
Mounting	Surface-mounted ceiling
Length	192 mm
Width	102 mm
Height	57 mm
Weight	0.40 kg
Ambient temperature	0 - 40 °C
Test system	CPS

### Light Distribution Curve



### Distance table

Mounting height	 a	 b	 c	 d
2.00 m	3.38 m	7.65 m	2.68 m	6.00 m
2.50 m	3.92 m	8.84 m	3.02 m	7.00 m
3.00 m	4.37 m	9.82 m	3.52 m	7.83 m
3.50 m	4.93 m	11.04 m	3.83 m	8.52 m
4.00 m	5.24 m	12.16 m	4.09 m	9.41 m
4.50 m	5.50 m	13.20 m	4.45 m	10.24 m
5.00 m	5.50 m	14.14 m	4.78 m	11.00 m
5.50 m	5.45 m	15.00 m	4.91 m	11.69 m
6.00 m	5.17 m	15.23 m	5.17 m	12.32 m
6.50 m	2.87 m	15.37 m	5.41 m	12.90 m
7.00 m	2.81 m	15.99 m	5.43 m	13.42 m
7.50 m	2.56 m	15.98 m	5.61 m	13.89 m