


**Figure | Dimensions**

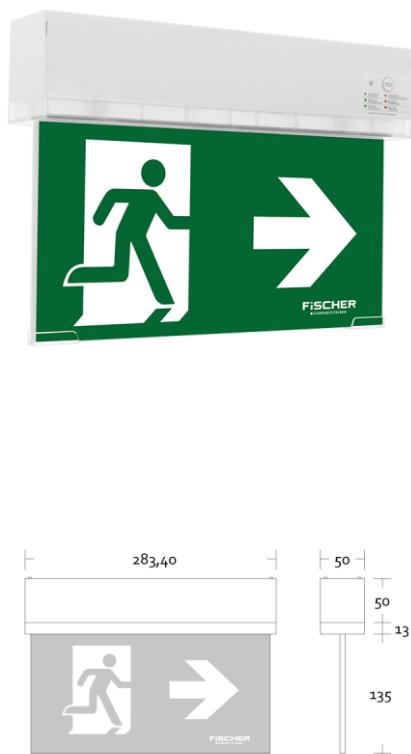

**Technical data**

Rated luminous flux of the luminaire	43 lm
Luminous intensity	11 cd
Colour temperature	6452 K
CRI	72.3
Beam angle	174.5 °
Light control	Planar illumination
LED power	3 W
Power AC	6.3 W
Luminance of pictogram	> 500 cd
Type of pictogram	Plugable foil
Viewing distance	27 m
Dimmable	No
Nominal voltage AC	230 V AC 50/60 Hz
Autonomy	3/8 h
Maintained mode	Yes
Suitable for maintained mode	Yes
Switchable operation mode	Yes
Degree of protection	IP54
Protection class	II
Housing colour	White
Housing material	Plastic
Mounting	Wall/Ceiling mounting
Length	283 mm
Width	50 mm
Height	198 mm
Weight	0.69 kg
Ambient temperature	-5 - 35 °C
Battery Cell technology	LiFePO4
Battery Nominal voltage	3.2 V
Battery Nominal capacity	1500 mAh
Test system	Automatic test system

**Light Distribution Curve**

